
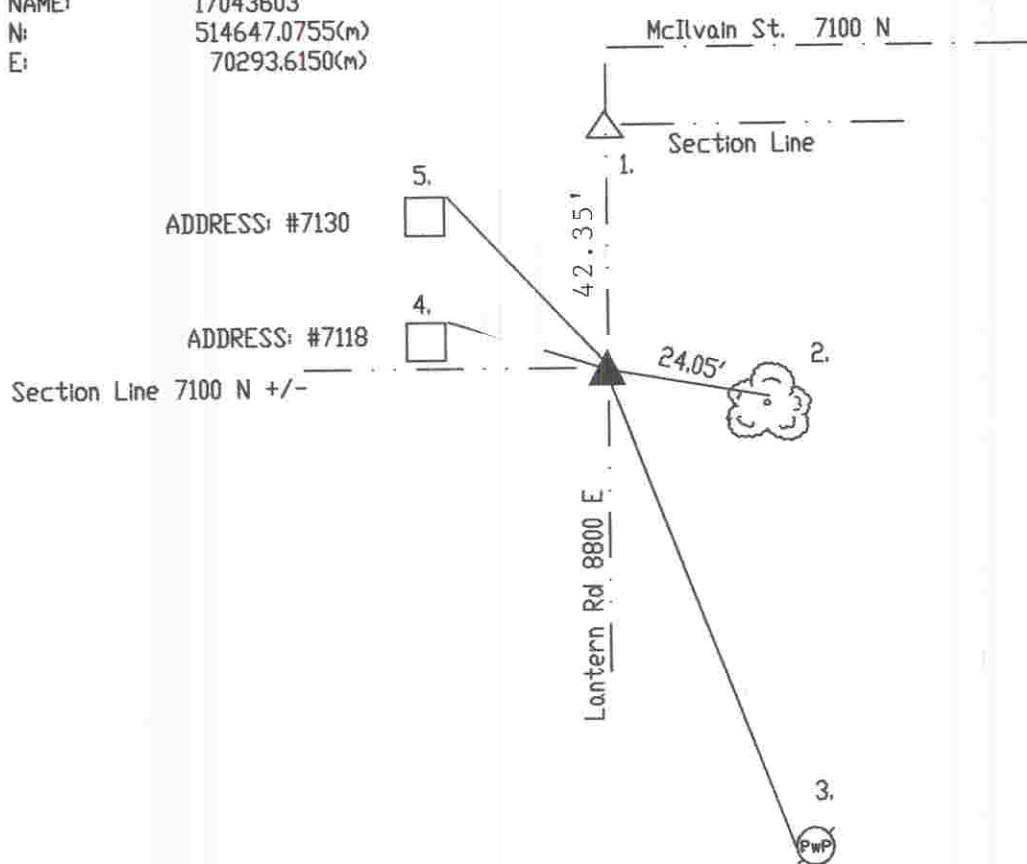


IN. S.P.C. E ZONE, NAD 83
NAME: 17043603
N: 514647.0755(m)
E: 70293.6150(m)

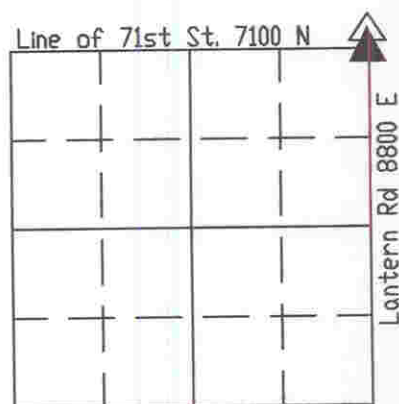

Original post set 1821 by Wm. B. Laughlin with witnesses: 15' beech S 3 E 24 links, 12' beech N 40 W 29 links per Marion County Atlas pg. 12. Survey by D.B. Hosbrook 11-22-1855 called witnesses: 16' beech S 38 E 31 1/2 links per Lawrence Township Legal Survey Book pg. 6. survey by Wm. P. Smith 7-25&27-1866 called SW corner of Sec. 30-17-5 stone witnesses with a stone S 63 links per Lawrence Township Legal Survey Book pg. 12. 3-9-55 called for stone 6' down. 5-11-76 called for railroad spike over stone 15' down. Excavated 7-9-86 and 1' iron pipe was found 18' down, no stone found. Set Harrison. Re-tied 7-13-99 by Kiste.

HC743603

REF.	DISTANCE	DESCRIPTION
1.	42.35'	Due N to NW corner of 31-17-5 (Harrison)
2.	24.05'	Boat spike N 12' thorn 4'up
3.	88.50'	PK nail W PwP#160-281 36'up
4.	23.64'	NE corner of brick column for address: #7118
5.	41.95'	NE corner of brick column for address: #7130